


Square Insulated Cam/Hinged access doors specifications

Cam
CIS0606GA
to
CIS2424GA

Hinged
HIS0606GA
to
HIS2424GA


STANDARD CONSTRUCTION

- ✓ All models are 1" insulation (R value=3.75) c/w Flange & Double Cam Lock. 2" insulation (R value = 7.5) c/w Flange & Double Cam Lock available special order.
- ✓ 24 gauge angled frame and double panel galvanized steel door, 20/22 gauge on doors 36" and larger (special order)
- ✓ Notched knock - over
- ✓ Air tight up to 2" w.g.
- ✓ High density, closed cell gasket seals the door to the frame.
- ✓ Meets S MACNA specifications

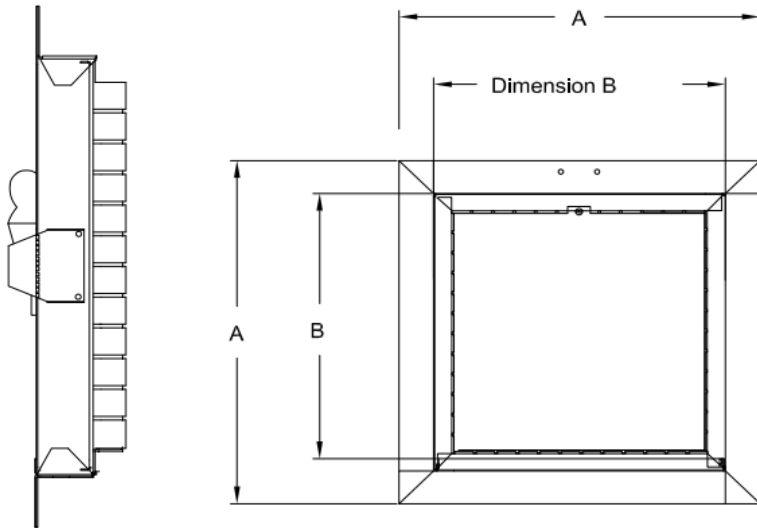

Cam Doors are complete with two (2) camlocks (doors up to 14") or four (4) camlocks (doors over 14"). Safety retaining chain is available as an option (special order)

Hinged Doors are complete with continuous piano type hinge on one side and one (1) camlock on the opposite side for sizes up to 14". Over 14" same continuous hinge on one side, and two (2) camlocks on the opposite side.

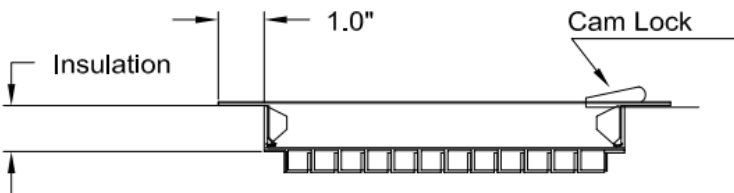

Available in Stainless steel (304 & 316) as special order.
NOTE: Camlock available in galvanized only

Dimension A	Dimension B
6x6	5x5
8x8	7x7
10x10	9x9
12x12	11x11
14x14	13x13
16x16	15x15
18x18	17x17
20x20	19x19
22x22	21x21
24x24	23x23